BANNER STAND CONSTRUCTION DIRECTIONS

Purchase at least 22' of sturdy $\frac{1}{2}$ " PVC pipe, 4 slip caps, 6 slip Tee's and 2 elbows. Cut the pipes into the following lengths:

- $4 34 \frac{1}{2}$
- $3 21 \frac{1}{2}$
- $4 9 \frac{1}{2}$
- 2 2 ¼"

Glue:

To both ends of one 21 1/2" length glue elbows

To both ends of two 21 ¹/₂" lengths glue Tees


Create two: $cap - 9 \frac{1}{2}$ length $- T - 9 \frac{1}{2}$ length - cap.

Glue the 2 ¼" pieces into each of the Tees to complete the bases.

Put the glue away. You can paint the pieces with black Fusion spray paint.

Assembly:

The banner can be attached to the stand with Hook and Loop tape at the top and at the sides near the bottom and/or holes can be drilled at the top ends of the stand (elbows) and something used to tie through the banner's grommets. The banners do not do well in windy situations – they need to be weighted.

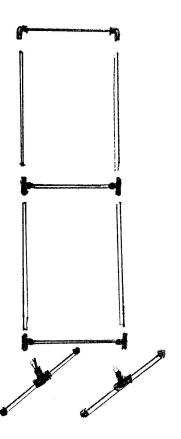

Assembly Diagram

R. Desilets, 2009